



# TEST REPORT

**Applicant: Mixtile Limited**

**Address: Haisong Building Tower B Suite 1101, Tairan 9th Road, Futian District, Shenzhen**

**Report on the submitted sample said to be:**

**Sample name: Mixtile Blade 3**

**Style/ Item No. : SBC-BLADE3-16128, SBC-BLADE3-0432, SBC-BLADE3-0864, SBC-BLADE3-32256**

**Trade mark: N/A**

**Sample Size: 100mm\*70mm\*30mm**

**Sample Weight:165.4g**

**Manufacturer: Haisong Building Tower B Suite 1101, Tairan 9th Road, Futian District, Shenzhen**

**Country of Origin: China**

**Sample received date: 2022-10-14**

**Testing period: 2022-10-14 ~ 2022-10-19**

**Date of Report: 2022-10-19**

**Testing Location: 901, No.40 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China**

**Category under the WEEE Directive: 2012/19/EU**

Signed for and on behalf of LCS

Young/Laboratory Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 901, No.40 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**REQUIREMENT OF RECYCLING AND RECOVERY RATE**

According to article 11 and Annex III, below minimum target of Recycling and Recovery rate should be met after 15 August 2018

Category	Product Type	Minimum Recycling Rate	Minimum Recovery Rate
1	Temperature exchange equipment	80%	85%
2	Screens, monitors and equipment containing screens having a surface greater than 100cm <sup>2</sup>	70%	80%
3	Lamps	80%	70%
4	Large equipment(any external dimension more than 50cm) including, but not limited to.	80%	85%
5	Small equipment(no external dimension more than 50cm) including, but not limited to.	55%	75%
6	Small IT and telecommunication equipment(no external dimension more than 50cm)	55%	75%

Recycling & Recovery Rate are calculated as following formulas:

$$\text{Recycling Rate} = \frac{\text{Recycling Weight}}{\text{Product Total Weight}} (\%)$$

$$\text{Recovery Rate} = \frac{\text{Recycling Weight} + \text{Energy Recovery Weight}}{\text{Product Total Weight}} (\%)$$

**Result of Reuse/Recycling/Recovery Assessment**

Reuse/Recycling/Recovery	Reuse/Recycling (%)	Recovery (%)
Reuse/Recycling/Recovery Targets under the 2012/19/EU WEEE Directive	55	75
Result of Assessment	58.7	79.2
WEEE Requirement Compliance	<b>PASS</b>	<b>PASS</b>

**Note:** Such products belong to Category 5



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 901, No.40 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Appearance of the Product




A

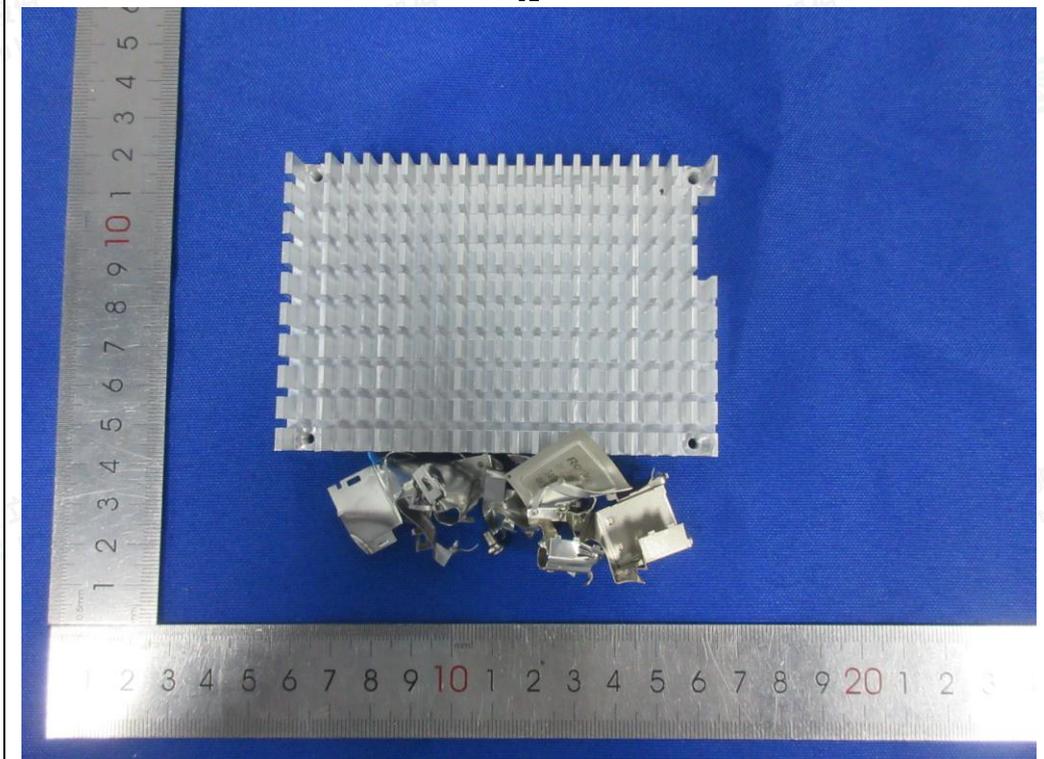


A1



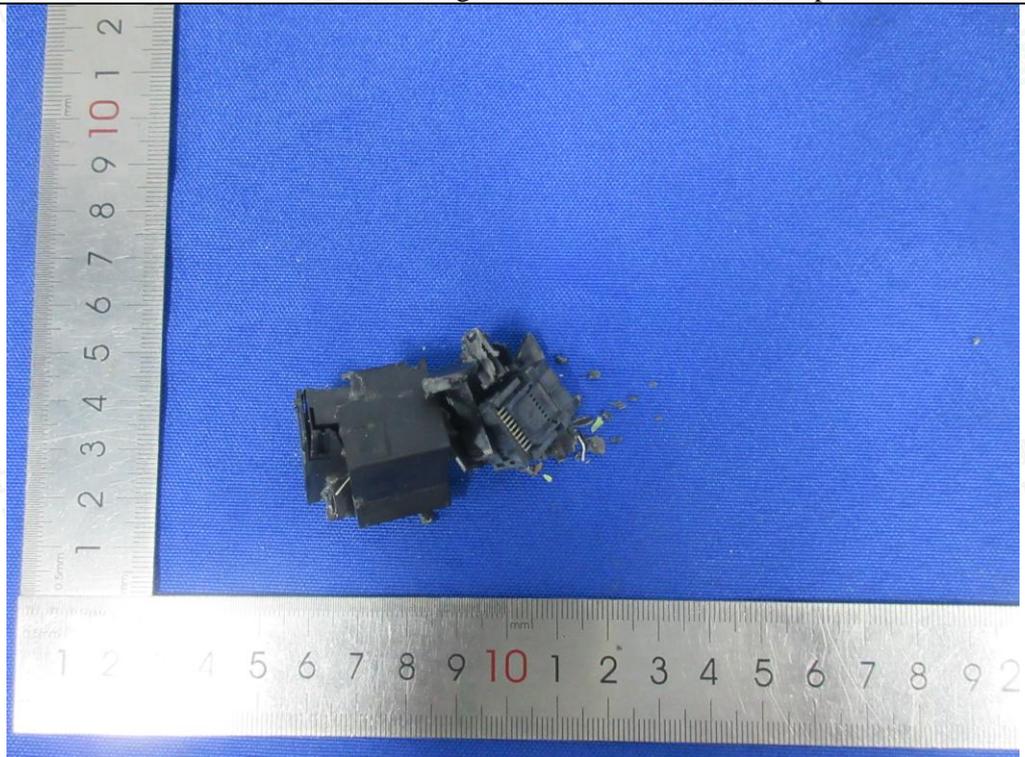

A2

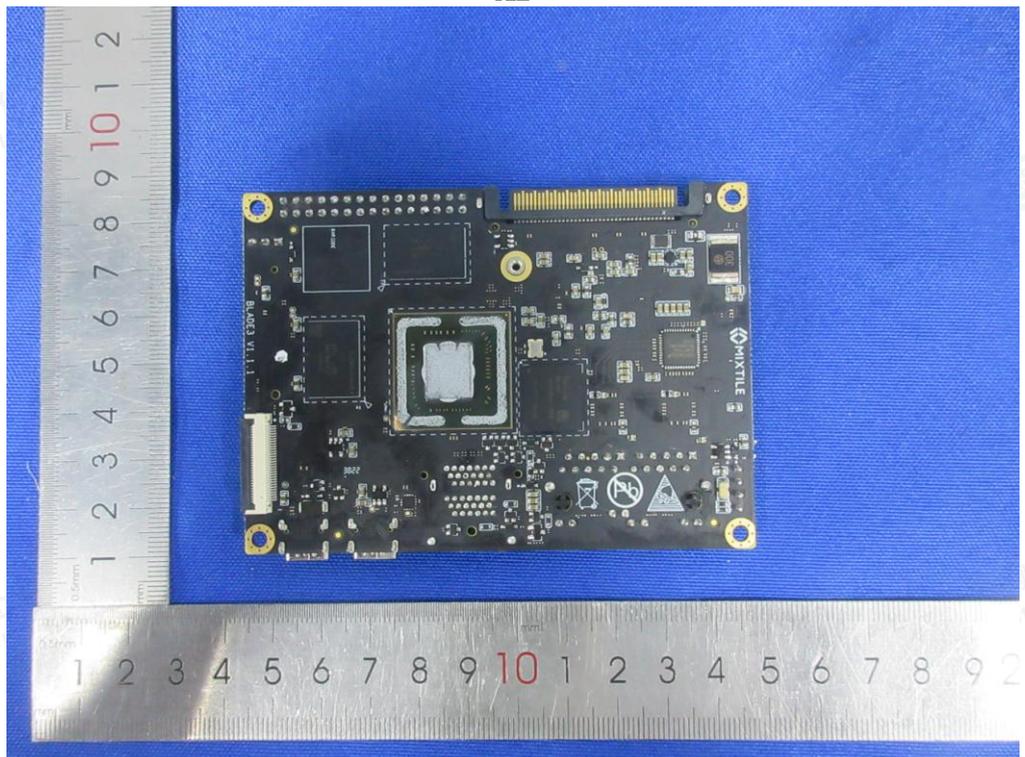

A3





Photo No.	Component/Material	Weight(g)	Percent Weight(%)	Reuse/Recycling (%)	Energy Recovery (%)	Recovery (%)
A1	Metal	105.5	63.78	40.4	13.7	54.1
A2	Plastic	12.4	7.50	5.2	1.8	7
A3	PCB	47.5	28.72	13.1	5	18.1
Total		165.4	100	58.7	20.5	79.2





### Disassembly Procedure

The disassembly procedure taken here is in accordance with the treatment requirements under the Annex II of the WEEE Directive. In addition, to consider economic and efficiency factors, manual operation and disassembly tools have been applied to separate the components and materials from this product in order to simulate the scenario at the treatment facility, and to achieve the objective that the separated components and materials from this product in order to simulate the scenario at the treatment facility, and to achieve the objective that the separated components and materials can be used, recycled and recovered.

### Symbol for the marking of electronic equipment



#### Note:

Due to their insignificant weight and the difficulty of their separation in a manual operation, sticker, solder, paint and printing material are not included in this assessment.

Plastic containing brominated flame retardants is not assessed in the list.

### Recycling and Recovery Rate Calculation

Reuse Recycling & Recovery Rate using in the report are calculated as following formulas:

Reuse & Recycling Rate = (Reuse & Recycling Weight) / (Product total Weight) (%)

Recovery Rate = (Reuse & Recycling Weight + Energy Recovery Weight) / (Product Total Weight) (%)

Total weight of the product is including the main product is including the main product and accessories

### ANNEX VII of WEEE Directive

Selective treatment for materials and components of waste electrical and electronic equipment:

- Polychlorinated biphenyls (PCB) containing capacitors in accordance with Council Directive 96/59/EC of 5 December 1997 adapting to technical progress Council Directive 67/548/EEC relating to the classification, packaging and labeling of dangerous substances,
- Components containing radioactive substances with the exception of components that are below the exemption thresholds set in Article 3 of and Annex I to Council Directive 96/29/Euratom of 13 May 1996 laying down basic safety standards for the protection of the health of workers and the general public against the dangers arising from ionizing radiation
- Electrolyte capacitors containing substances of concern (height > 25mm, diameter > 25mm or proportionately



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 901, No.40 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



similar volume)

### Recommendations for WEEE Directive Compliance

- In order to avoid the product not meeting the reuse/recycling/recovery targets regulated under the WEEE Directive and the regulations of EU countries, the applicant company should, when selecting material and components design, consider they can be easy to reuse and recycle, this consideration will lessen the impact of the required international environmental directives and also improve the product's competitiveness
- It is recommended that the applicant company, when designing new product, especially where components and material have a large weight ratio, should consider using recyclable materials in order to increase the product's reuse/recycling/recover ration
- The product should apply to the RoHS Directive(Directive 2011/65/EU on the restriction of the use of certain hazardous substance in electrical and electronics equipment), the hazardous substance specification in the Directive should be controlled in the homogenous material of this product

If a product has changed its product design, or materials or components employed, then the product should be reassessed and retested in accordance with the WEEE Directive for reuse/recycling/recovery assessment and RoHS for restricted/banned substances requirements.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 901, No.40 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity